



Double Suspension

2 std SafeTrack-bulb

SafeTrack General rules

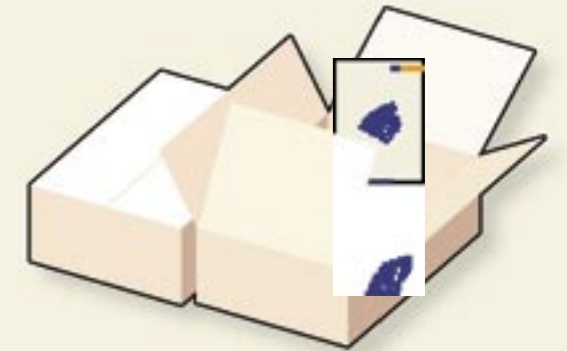


Please find Information on delivery and installation in the box labelled INFO.

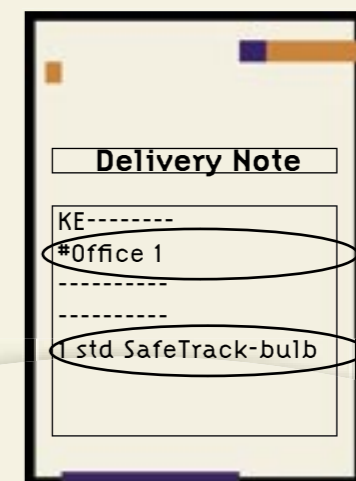





Room reference

Suspension type

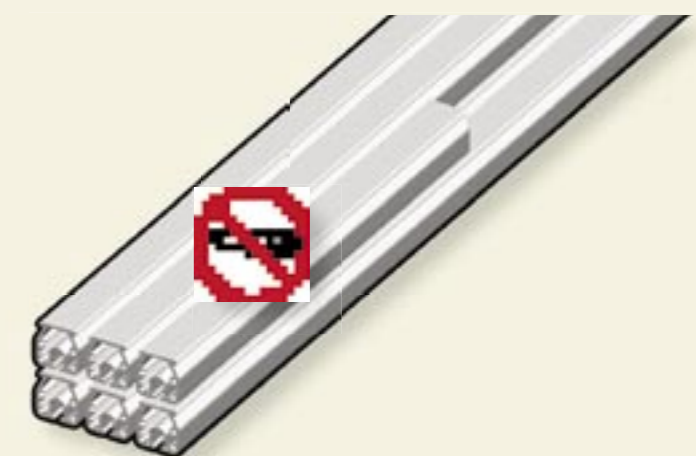

Alu-rails labelled with a saw symbol do not require further trimming.

0980016-GB

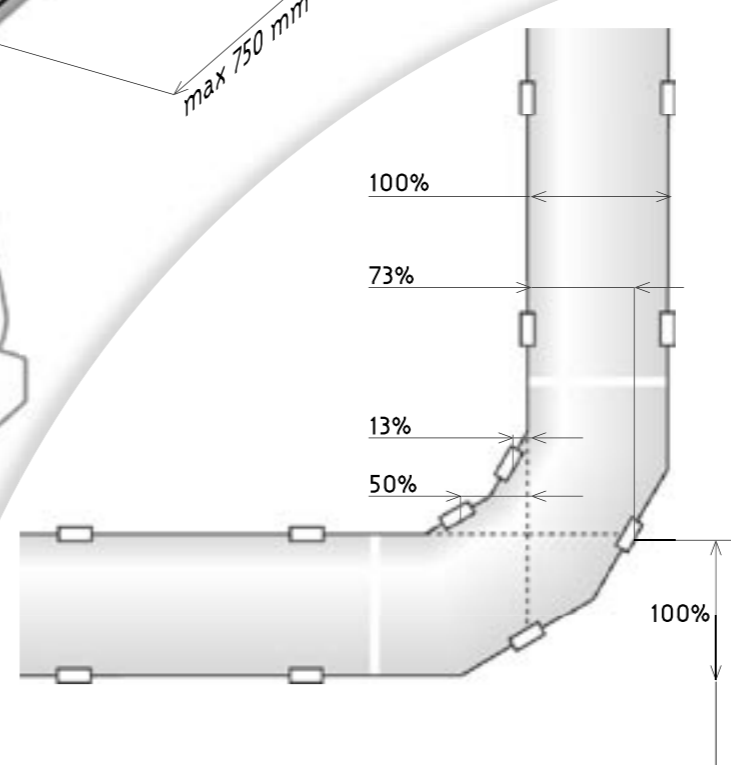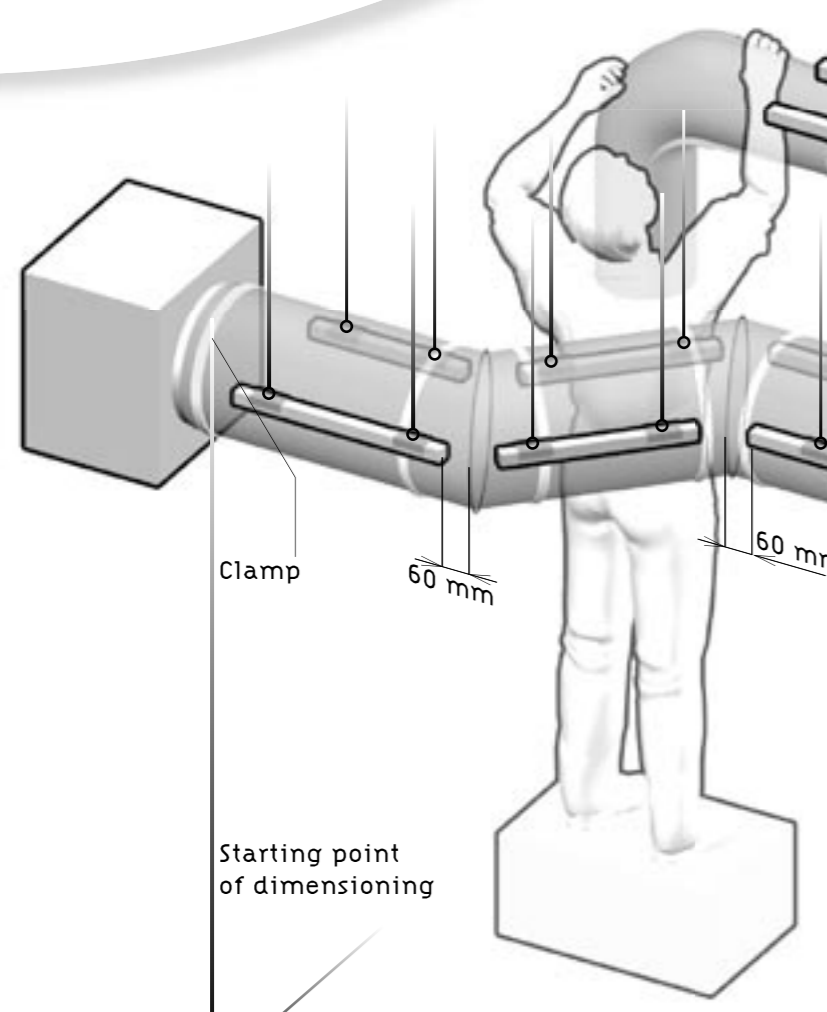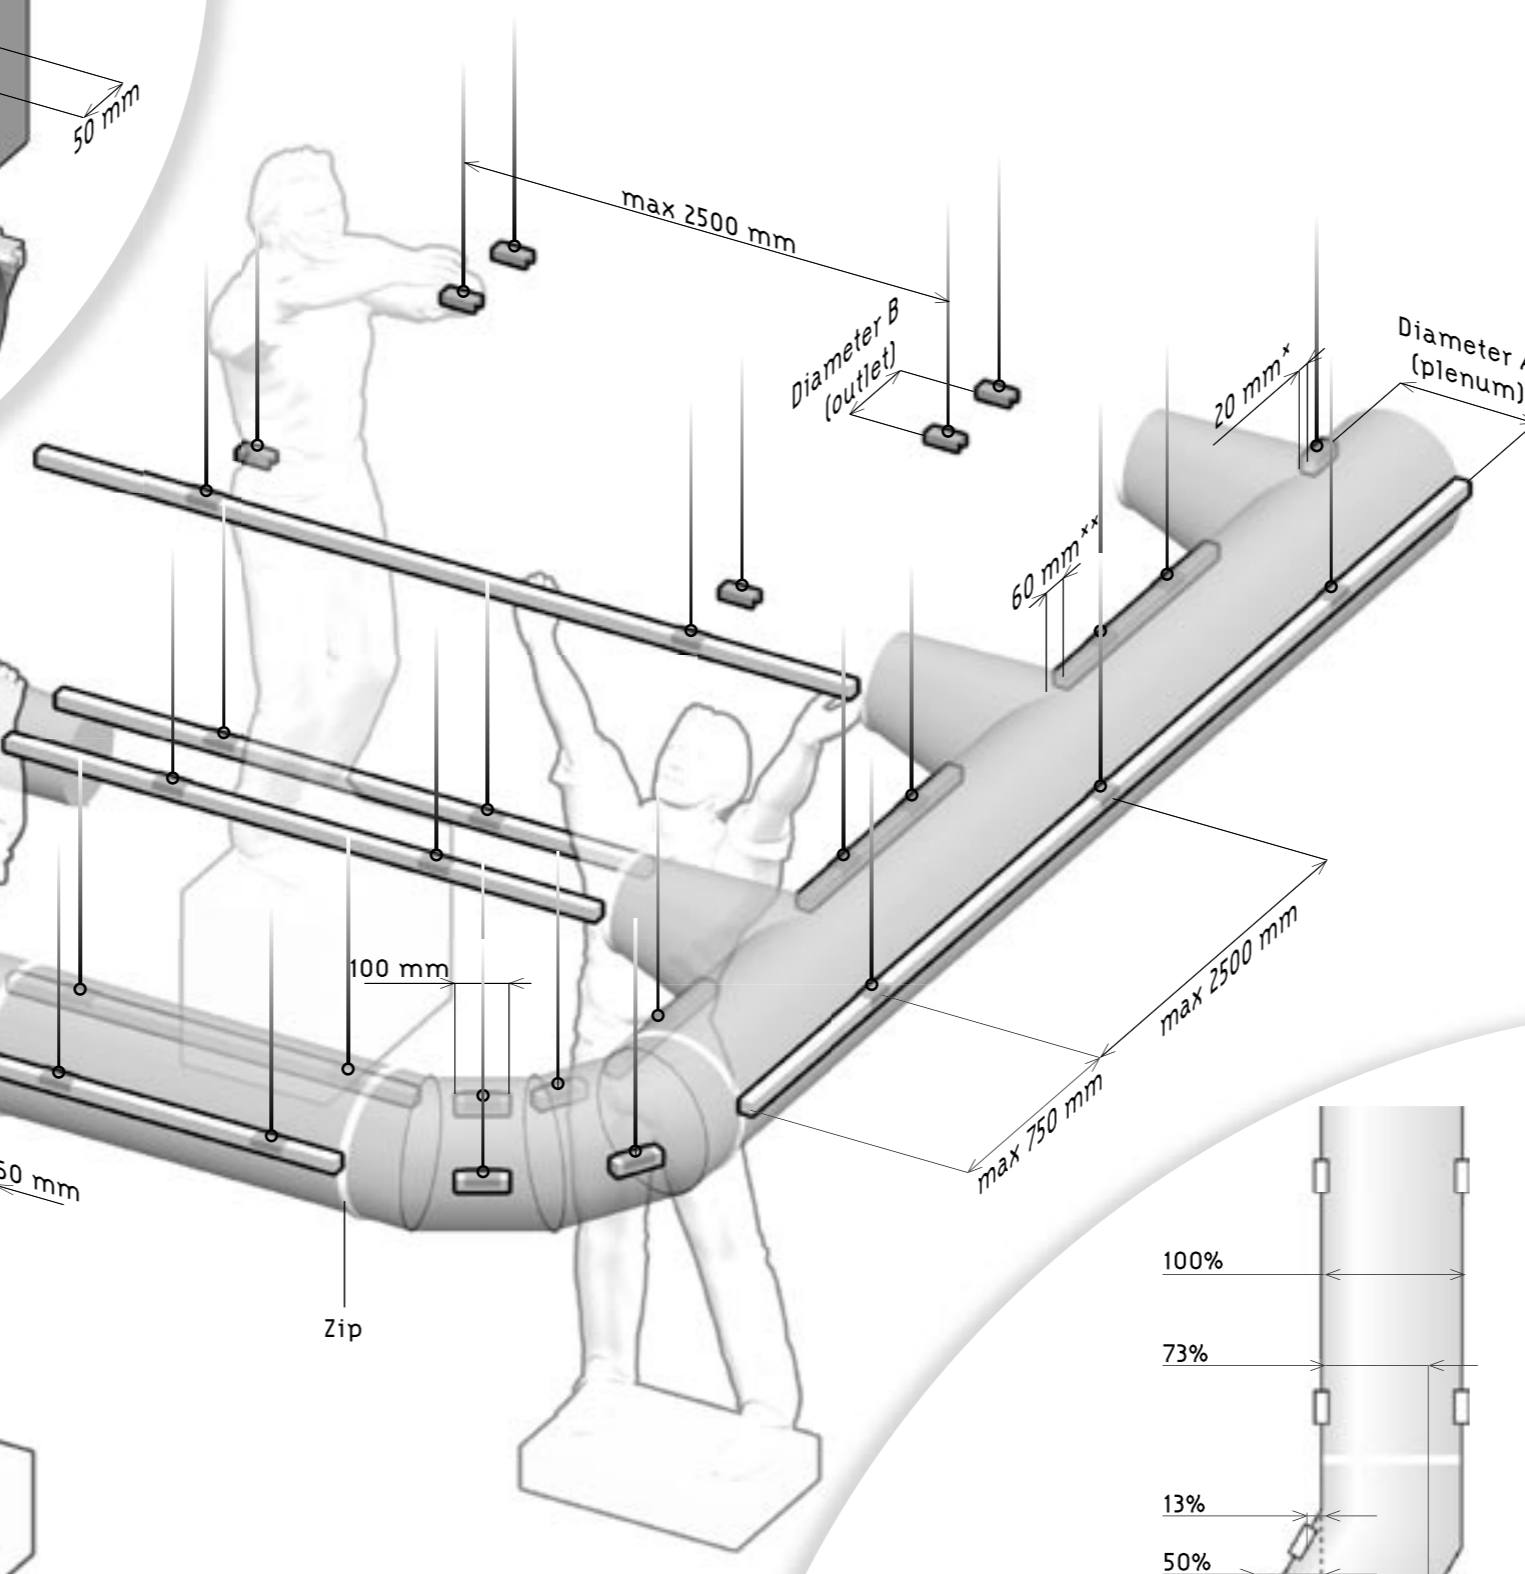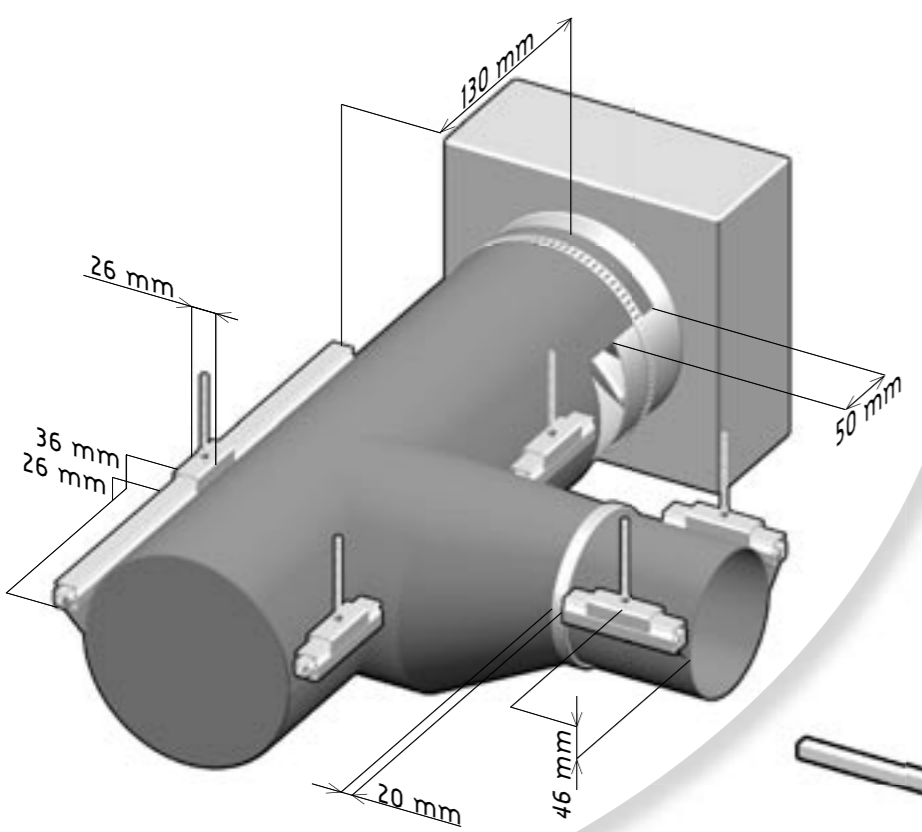

* 20 mm "externally" between end of SafeTrack and side of outlet socket
 ** 60 mm "internally" between end of SafeTrack and side of outlet socket




Please note that some relevant information may be on the reverse side

Single Suspension


1 std SafeTrack bulb

SafeCeil

Please note that some relevant information may be on the reverse side

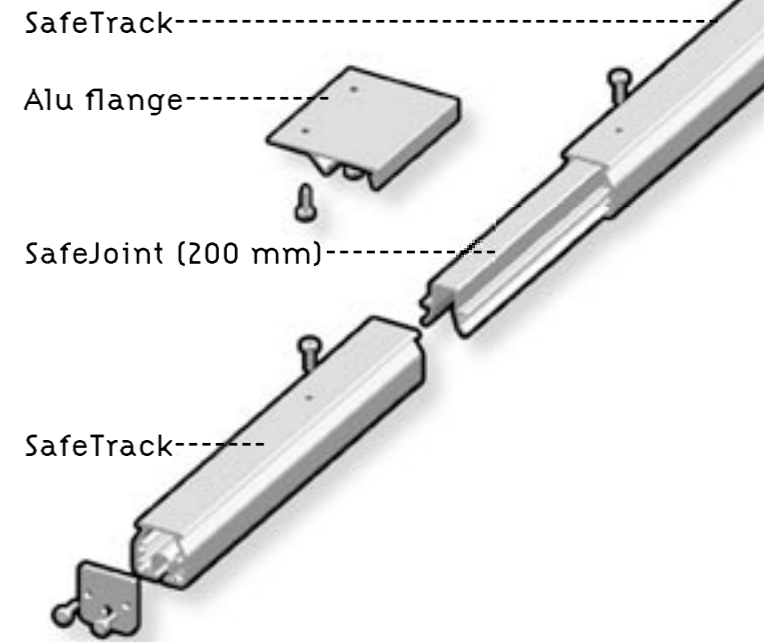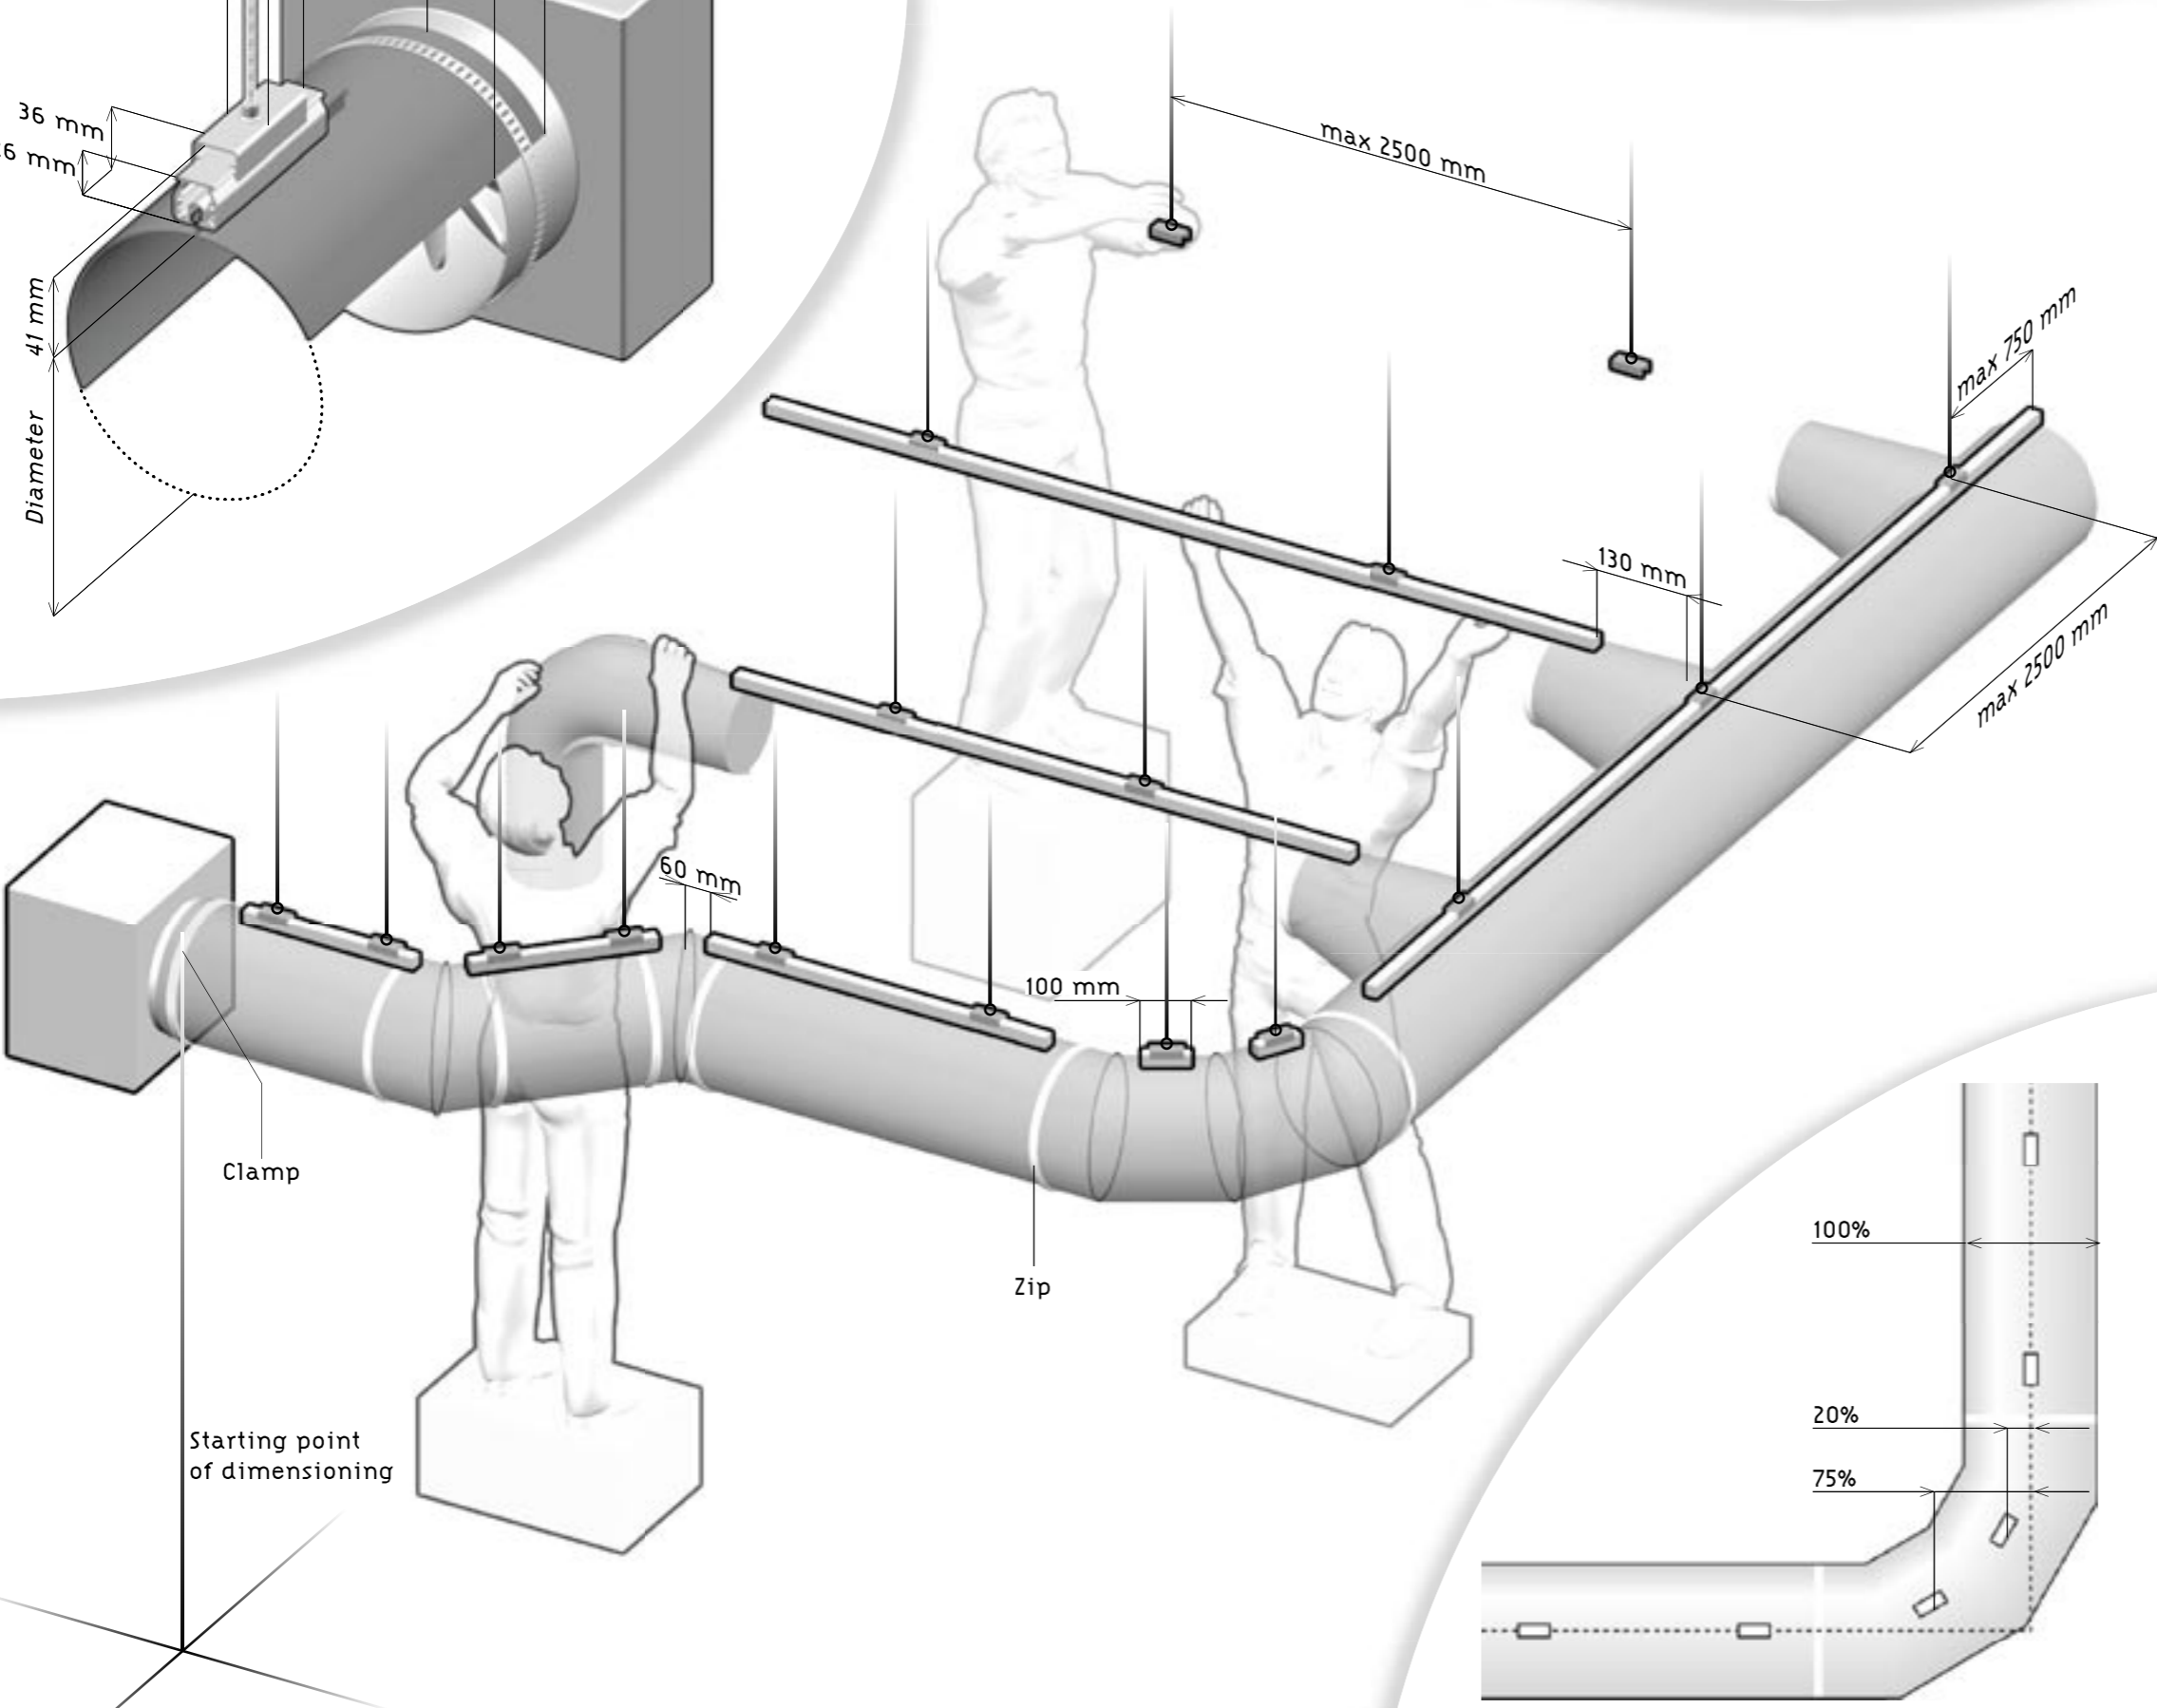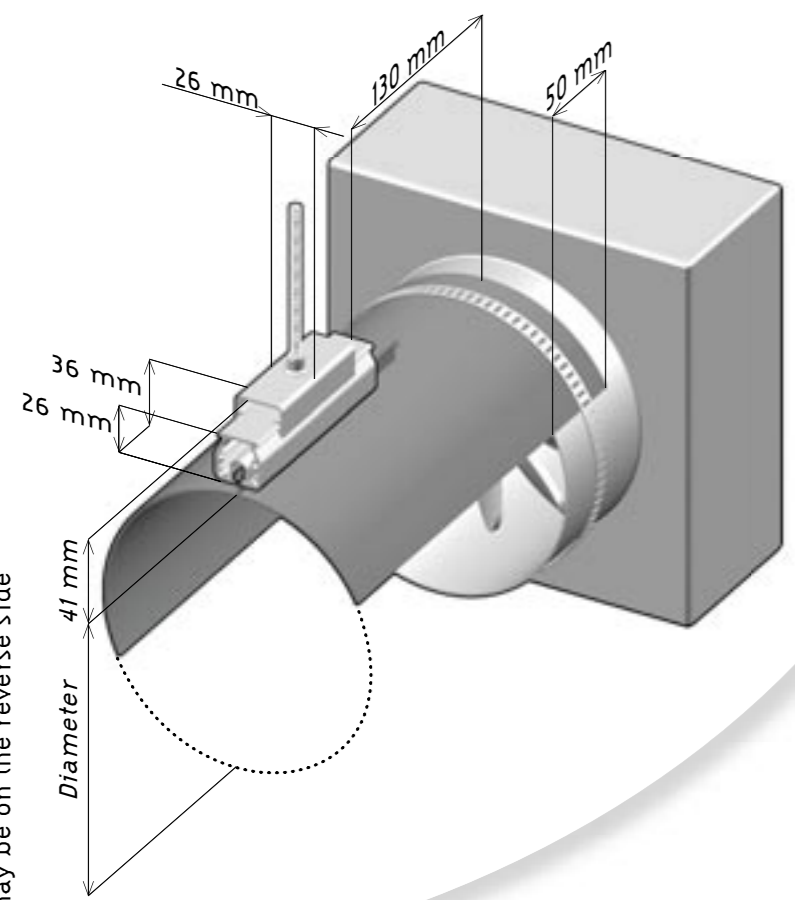

End section
(must be fitted before the ducts can be mounted into SafeTrack)

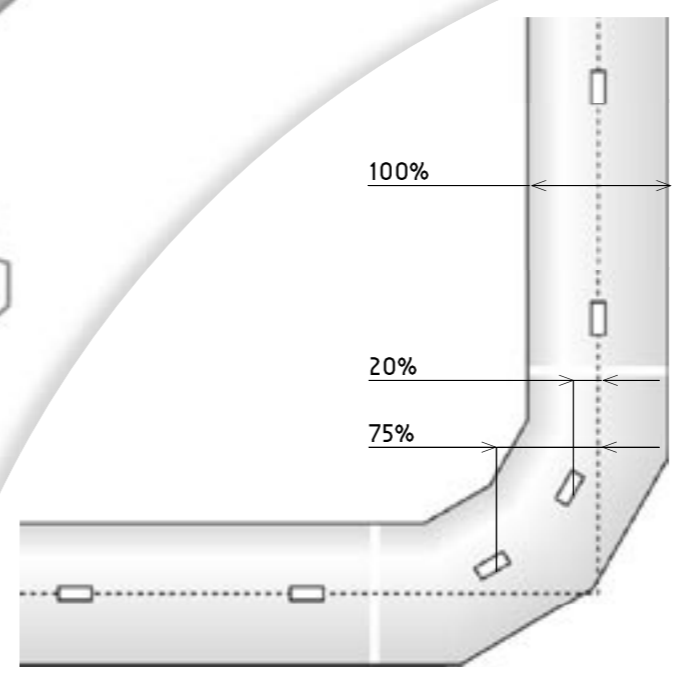

Upon assembly, the SafeTrack is clicked into the alu-suspension.